
to each other.

reduce the units' range and affect how they link about 50 metres indoors. Thick walls and doors baby units is about 250 metres outdoors and The maximum range between your parent and

What's the range?

linked so they are now ready to use. The parent unit and baby unit are automatically



the parent unit on.

Press the button and hold for 2 seconds to turn

get audio feedback sounds.


metre from the baby unit. Any closer and you might Before you do, move the parent unit at least one

can switch it on.

6. After the parent unit has charged for 12 hours you

looping any extra length and securing it. Keep the power cord out of baby's reach by

unit up to turn it on. 5. Slide the Off (E) On button on the side of the baby



(BLJ06W050060P1-B). Please use power supply unit item code 089009 the mains power socket and switch the socket on.


4. Plug the cable into the baby unit, then plug it into away from your baby.

most of the time. It should also be at least one metre room where you're going to be monitoring your baby 3. Place the baby unit near a power socket in the

amount of time, turn it off while it's charging. short time. To charge the parent unit in the shortest minutes to charge enough for you to use it for a When the battery gets very low, it'll take about 30 longer than this or throughout the night. the mains power socket if you're going to use for We recommend you keep the cable plugged into The battery life on a single charge lasts for 4 hours. to fully charge.

haven't used it for a long time, it'll take 12 hours The first time you use the parent unit, or if you

2. Leave to charge for 12 hours.

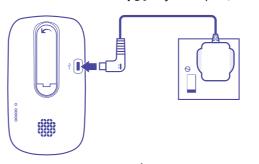

(BLJ06W050060P1-B).

on. Please use power supply unit item code 089009 into the mains power socket and switch the socket 1. Plug the cable into the parent unit, then plug it

dn təs gnittəð

leak flammable liquid or gas air pressure as the battery may explode or fire, a hot oven or is crushed or cut. Don't subject the product to extremely low I he battery could explode it placed in a Take care when disposing of your product. If you need repairs, get in touch with our

The battery can't be removed or replaced.

eplacement unit.

temperature sensor. Please get in touch with our helpdesk to discuss a onr parent unit, it may indicate a loose shows as 0°C/32°F on the display of If the temperature is not appearing or with your doctor before installation. It you've got a pacemaker please check ueoue erze, z broperty or privacy. your camera in places where it may affect with applicable laws it you want to use You must have permission and comply

or appropriate measures to safeguard When used to monitor property, this product isn't a substitute for insurance adult supervision. e a substitute for responsible This product is designed as just an aid. It and you risk an electrical shock.

adapters, i nere are no serviceable parts Don't try to open your devices or pow section of the user guide. netpdesk, see terms in the Guarantee immediately. Switch off your electrical socket if it is safe to do so and contact our appear damaged, discontinue use

If any parts of your product or any cables

away from extreme near or cold. overheating. When not in use, store in a dry place and any parts or any vents that could cause

Regularly check that objects don't cover

Regularly check your product for damage vibration, and don't pull or twist any cables. Treat all parts with care; no shock or Care and maintenance usy apply such as in hospitals.

before using or installing where restriction This device uses wireless technology; check

cloth for the lens); do not use water,

Dust with a soft dry cloth (a microfibre

Don't use near flammable substances or in a flammable atmosphere (e.g. warehouse Cetween 0 and 40°C.

wood or delicate fabrics); place on a mat Product may cause scratches or marks if placed on fragile surfaces (e.g. veneered

or near sources of water or splashes. searces and power adapters in damp areas helpdesk if you need a replacement. Electronic devices hate liquids; don't place

I for this specific device; contact our bed or playpen.

Only use power adapters provided by

Pt for this spacific dovisor separate our yug uever place any parts inside a cot,

Keep device and cables out of young children's reach – at least one metre away. ruick carpets.

in cupboards or back of sofas) and don't block any vents with objects or Keep area ventilated (e.g. don't put

(e.g. away from radiators, window sill or Position all parts away from heat and sun For indoor use only in UK and Ireland. nstallation and location

carefully before installing and using it. read the following instructions European safety standards. Please BT is manufactured to comply with Your Video Baby Monitor 3000 from

Keep for future reference Important safety and care instructions



Troubleshooting

Can I add another camera unit to

 BT currently does not sell add-on camera units. A brand new bundle will need to be purchased.

My parent unit / baby unit isn't working, what should I do?

- Please ensure the parent unit is fully charged or plugged into
- Ensure both parent unit and baby unit are switched on.
- Move the parent unit closer to the baby unit and away from large obstructions or other electrical devices as these may affect the signal between the two units.
- · Switch the baby unit off, and wait for about 15 seconds and then switch back on again.

Why can I hear a high-pitched noise?

• This is likely to be caused by the units being too close to each other. We recommend they are kept at least 1 metre apart and preferably in different rooms.

Why is my parent unit beeping?

The parent unit only beeps when:

· The baby unit is switched off and there is no connection to the

- The units are too far apart, please move them closer (but not closer than one metre).
- The battery on the parent unit is low, please plug into the mains
- · Interference may be causing connection issues, please ensure both devices are moved away from other electrical devices (TV's Microwaves, mobile phones etc.)

Why is the parent unit not making any sounds even though there's noise from my baby's room?

- Please ensure both units are plugged into the mains or that the parent unit is fully charged.
- · The speaker may either be on mute or the volume is too low to hear.
- The parent unit may be out of range of the baby unit, please move closer (but keep at least 1 metre apart to avoid interference). In this scenario the parent unit would beep to inform you of this issue.
- · Large metal obstructions and other electrical devices may be impacting the signal. Try relocating both devices if possible

Other information

Radio transmission information

Frequency range (GHz) 2.415–2.471 Max power (dBm)

Radio Equipment Directive Power Efficiency Info

Hereby, British Telecommunications plc declares that the radio equipment type VBM3000 (088304) is in compliance with Directive 2014/53/ EU. The full text of the EU declaration of conformity and power efficiency information is available at: bt.com/producthelp

This device has been evaluated for and shown compliant with European Guidelines when installed and operated with a minimum distance of 16mm between the unit and your body.

The item code for both power supply units is 089009 (BL J06W050060P1-B)

The full text of the EU declaration of conformity is available at the following internet address: bt.com/producthelp

Disposing of your old electrical and electronic equipment

The Government has a legal requirement to minimise the unsorted waste disposal of electrical and electronic equipment and to maximise its separate collection and environmentally sound management The symbol shown here and on the product, means you shouldn't throw it in your normal rubbish at the end of its working life.

This product may contain substances that could be harmful to people or the environment if it's not recycled correctly. Check with your retailer to find out how to recycle your old equipment, or if you've bought something from us that has the crossed out wheelie bin symbol on it and it's similar to the kit you don't need any more, you can send us you old kit and we'll get rid of it in an environmentally friendly way

Here's the address: WEEE Take Back Scheme, BT Returns, BT DF, Darlington Road, Northallerton, DL67ZY.

Website address: bt.com/weee

We're not responsible for the costs of returning items. If you don't wish to return kit to us, lots of electronics shops have their own 'take back' schemes where you can recycle very small electrical and electronic goods. If you're a household user, you can also take it to your local recycling centre go to recyclenow.com to find the one nearest to you. Please dispose of this carefully and help to protect our planet.

Guarantee

Your VBM3000 is guaranteed for 2 years from when you bought it. This means we'll either repair it or replace all or part of the product if it's not working properly.

If you bought the product more than 28 days ago, we might replace it with a refurbished or repaired one.

Guarantee conditions

- The guarantee only covers problems found in the 2 year guarantee period · You'll need your receipt or other proof
- · Your product is returned to BT or one of our partners as instructed.
- · This guarantee doesn't cover any problems caused by accidents, misuse fair wear and tear, neglect, tampering with the equipment, or any attempt at adjustment or repair other than through approved agents. · The guarantee is valid within the UK and
- Ireland only. You're responsible for the cost of returns to the original retailer or repair agent. If BT needs to provide replacement parts, these can only be despatched to an address within the UK
- · This guarantee doesn't affect your statutory rights.

Within the 2 year guarantee period

Before returning your product, please take a look at the Help section beginning on page 1 or contact the Baby Monitor Helpline

Additional answers to frequently asked questions are available from bt.com/producthelp. If the helpdesk can't fix the problem, they'll let you know how to get a repair or a replacement. If you need to return your product please pack it in the original box if you still have it and make sure you include all the parts such as cables and power supplies You'll also need a fault reference number from the helpdesk. This does not affect your statutory rights.

Outside of the 2 year guarantee period

If your product needs support after the guarantee period has ended. we recommend that you contact BT's recommended support agent Discount Communications on

To find out what to do if your product is in or outside of the 2 year guarantee, please visit bt.com/producthelp

Available in other formats including braille, large print or audio CD. If you would like a copy, please call 0808 100 6554*.

© British Telecommunications plc 2020. We're registered in England at 81 Newgate Street, London, EC1A 7AJ, UK (company number 1800000)

* Calls to our helpdesk made from the UK mainland and mobile networks are free. International call costs vary. Video Baby Monitor 3000 UG (07/20) Issue 7



Video Baby Monitor 3000

User guide

 ϵ

Using your Video Baby Monitor

In this section you'll find out how to use your baby monitor to make sure you get the best possible use out of it.

To start using your baby monitor, you'll need to turn both units on. You'll see where the Power buttons are located in

The features outlined below are all accessible through the **MENU** which can be opened by pressing the Menu button, using the **〈** and **〉** buttons to navigate, **∧** and **∨** to scroll through the sub menus and or to select the desired option. To return to the camera feed, simply press the button.

There are 8 volume settings. The default is 4.

- 1. In normal monitor mode (X1), press ∧ or ∨ to change the volume.
- 2. Press ok to confirm.
- 3. To turn the sound off completely, turn the volume down to 0. will be displayed on top of the screen.

O Screen brightness

There are 8 brightness levels. The default is 4.

- 1. In normal monitor mode (X1), press < or > to select the brightness level.
- 2. Press ok to confirm.

d Lullabies

There are 5 lullabies to choose from or you can play all 5 in sequence.

- 1. Press Menu, ∂ is displayed, press OK.
- 2. Press ∧ or ∨ to choose the lullaby 1-5 or press ³⁄₂ to play all five, then press ok .
- 3. Press ∧ or ∨ to select the volume from 1-3 and press ok
- **4**. To stop the lullaby playing, select \bigcirc .

Talk to your baby

To give your baby some words of comfort, press and hold down and speak into the parent unit's microphone. The θ icon will be displayed at the bottom right corner. Release the button when you've finished speaking.

⊕ Zoom in/out

- 1. To enter zoom mode, press ▶ to display € and press ok .
- 2. Press ∧ or ∨ to select the zoom level and press or to save. Press Menu to return back to the camera feed.

When in X2 mode you are able to move the picture using **^**, **∨**, **⟨** or **⟩**.

To adjust the volume or screen brightness, press ____ and select () or () and press () .

Set a reminder

You can set an alert to remind you of something you need to do, for example when your baby's next feed is due. You can set it for 2, 4 or 6 hours.

- 1. Press Menu, then press ✓ to display ② and press ok.
- 2. Press \land or \checkmark to select the reminder time (2H, 4H or 6H), then press or to save. The will be displayed on the top right of the screen.
- 3. To cancel the alert, select Q.

Set the screen to turn on and off automatically

You can set the screen to turn on by pressing any button. On this setting, the screen will turn off automatically when no button is pressed during 1, 3 or 5 minutes.

- 2. Press ∧ and ∨ to select 1, 3 or 5 minutes and press or .
- 3. To turn the screen back on at any time, press any button. If you want to set the screen on all the time, set the screen setting $\triangleright 11$ to off \bigcirc .

dB) Turn sound activated screen mode on or off

When set to On, the screen will turn on if noise is detected from the baby unit. If it's set to Off, the screen will stay off even if noise is detected. To use this feature, you need to set the standby mode first to 1, 3 or 5 minutes as described above.

- 2. Press ∧ or ∨ to select ✓ (for On) or X (for Off) and press OK.
- 3. To turn the screen back on at any time, press the [o _.

Temperature sensor

The reading from the temperature sensor will be displayed at the top of the parent unit screen.

To change the temperature display from C to F:

- 1. Press Menu, then press ✓ to display

 and press or .
- 2. Press ∧ or ∨ to select °C or °F, then press or .

Night vision

So that you can see your baby at night, the baby unit automatically uses the light from its infrared LED lights to capture images in a dark room. Because of that, it can only show images in black and white. The & icon will be displayed at the top of the screen.

Other screen icon descriptions

Signal strength

Sound on

1 Baby unit switched on

number e.g. Camera 1

≮ Mute **Q1** Camera identification

■ Battery status (Full battery shown, scrolling when charging) Blue when mains


power adapter


is on, red when

battery low.

Get to know your Video Baby Monitor

Find out how your baby monitor works by familiarising yourself with the buttons and lights.

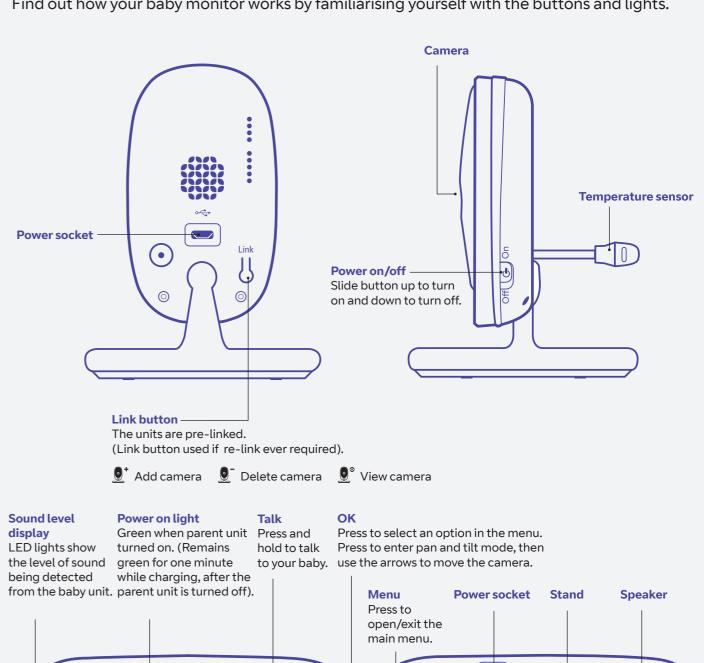

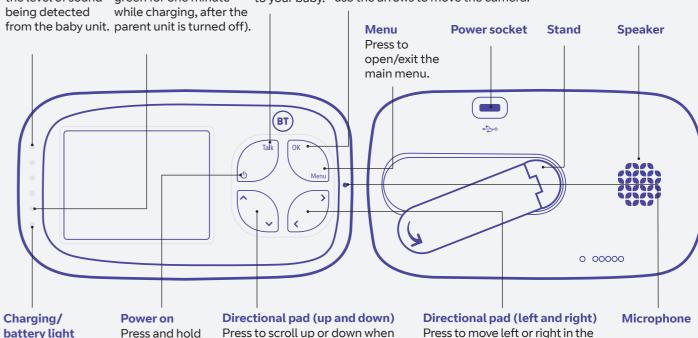

menu or to increase or decrease

the brightness level.

you're in the menu.

the speaker volume.

Press to increase or decrease

to turn the unit

Press once to

standby mode.

on and off.

switch to